


SV Single-Axis Speed/Torque Curves


All SV speed/torque data assume the following conditions:

- 40°C ambient temperature
- nominal K_T of motor


HDY70C4-44S w/SV2500S (230 VAC)

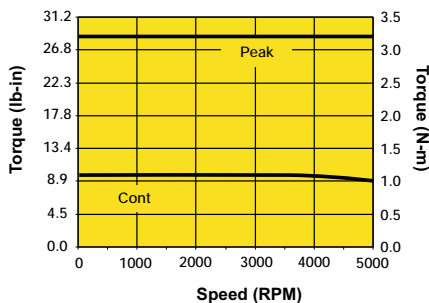


HDY92E4-44S w/SV2500S (230VAC)

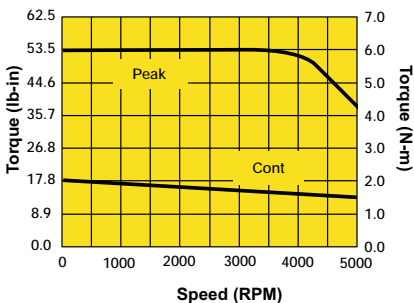


HDY115A6-88S w/SV2500S (230VAC)

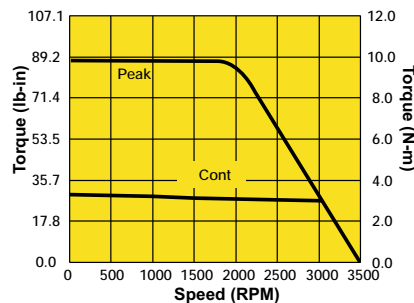


HDY70C4-44S w/SV4500S (460VAC)

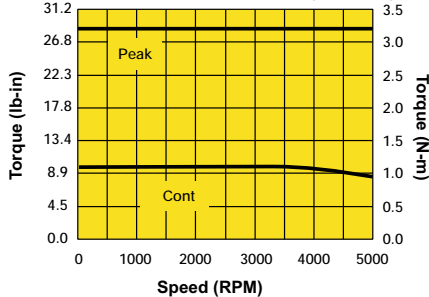


HDY92E4-44S w/SV4500S (460VAC)

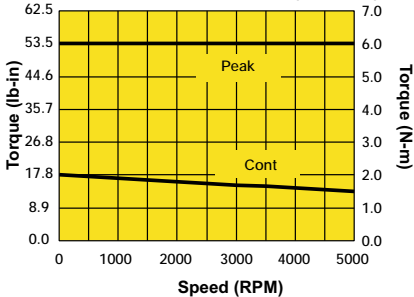


HDY115A6-88S w/SV4500S (460VAC)

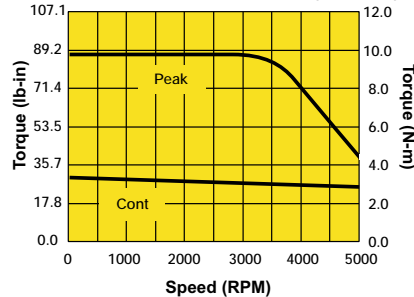

HDY115C6-88S w/SV8500S (460VAC)

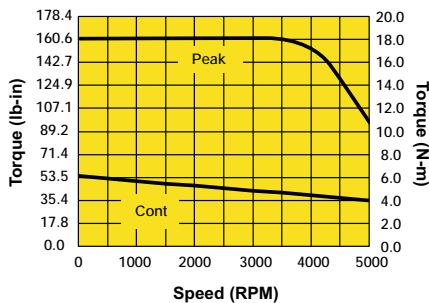

HDY142C6-88S w/SV8500S (460VAC)

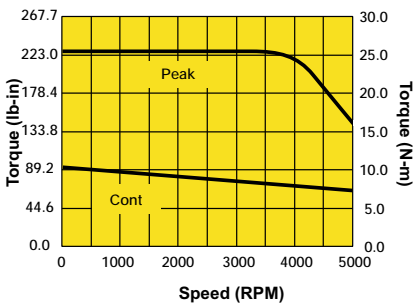

For drawings and specifications of the recommended motor packages, please refer to the COMPAX section.

Drives & Drive/Controllers