


SV Multi-Axis Speed/Torque Curves


All SV speed/torque data assume the following conditions:

- 40°C ambient temperature
- nominal K_T of motor


HDY70C4-44S w/SV200M (460VAC)

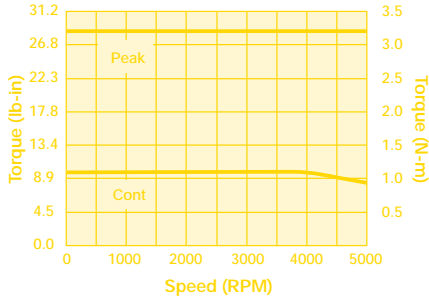


HDY92E4-44S w/SV200M (460VAC)

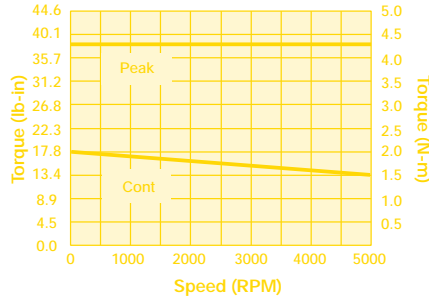


HDY115A6-88S w/SV200M (460VAC)

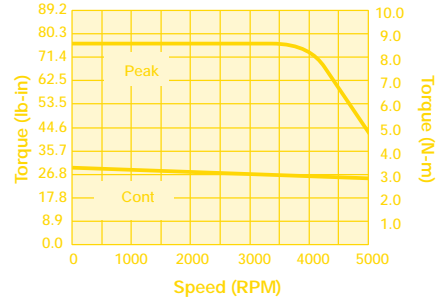


HDY115C6-88S w/SV500M (460VAC)

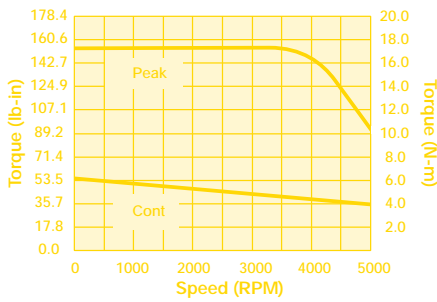


HDY142C6-88S w/SV500M (460VAC)

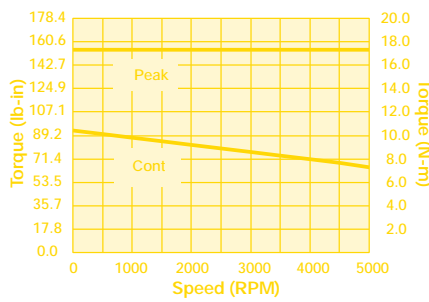


HDY142G6-88S w/SV1500M (460VAC)

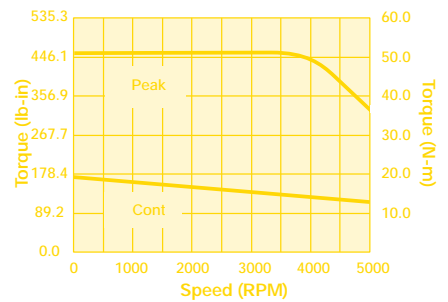

HBMR190E6-88S w/SV1500M (460VAC)

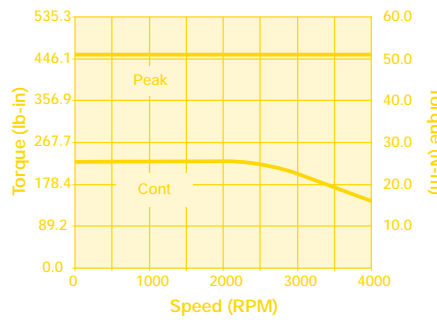

HBMR190J6-260S w/SV1500M (460VAC)

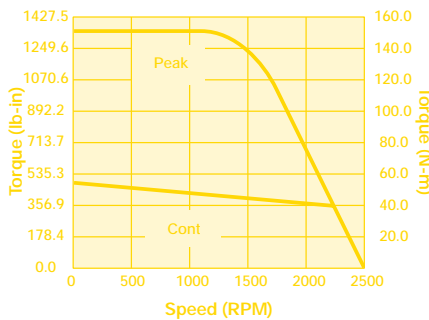

For drawings and specifications of the recommended motor packages, please refer to the COMPAX section.

Drives & Drive/Controllers